




PRODUCT FEATURE

Programmable Pressure switch

MAIN FEATURES

No. of Channels:	2 independent Switches
Switch current:	up to 1A per Channel
Output signal:	PNP: NO, NC, window
Switch delay:	configurable, up to 2 seconds
Pressure range:	up to 5000 bar
Temperature range:	down to -50°C / up to +125 °C
Materials:	SS 303 und 304, 316L, others
Dimensions:	≤ 70 mm / Ø 22 mm (depending on config) Standard size for optimal system integration
Weight:	max. 100 g

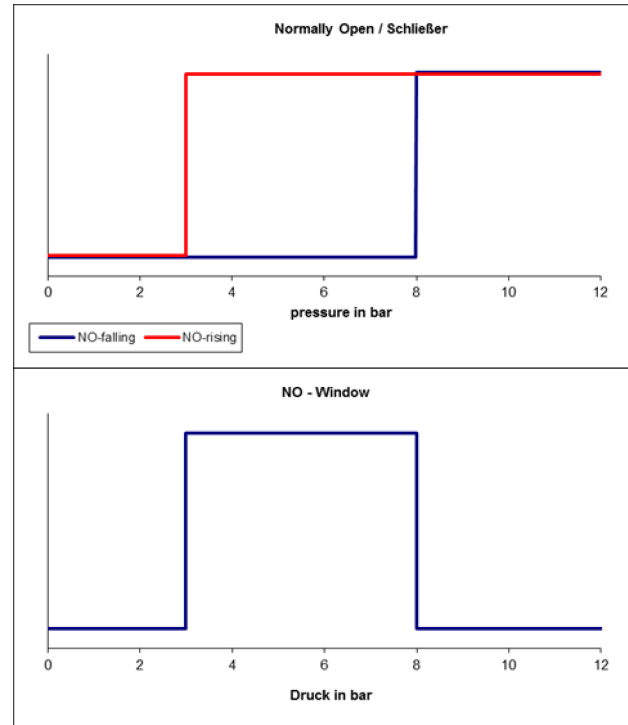

APPLICATIONS

- Stationary and mobile hydraulic and pneumatic system
- Pressure monitoring with direct switches for fans, valves and others
- Standby system e.g. with NO-configuration
- Parametrization and setup of hydraulic and pneumatic systems
- Laboratory and analysis applications

FLEXIBLE PRODUCT FEATURES

- Customized configuration of set points
- Pressure fitting and electrical connector selectable from many options
- Easy installation and usage, software based programming